


■ 型号含义 Meaning of Model

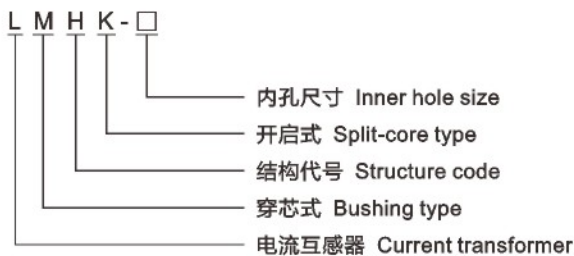

■ 概述 Description

本系列开启式电流互感器主要用于母排安装，产品结构合理，采用高导磁硅钢铁芯，精度高，性能稳定。不同规格可满足不同范围电流测量。

This series of open-type current transformers are mainly used for bus bar installation. The product structure design is reasonable. It adopts high magnetic permeability silicon steel core with high precision and stable performance.

Different specifications can meet different range of current measurement.

■ 技术参数 Technical data

额定二次电流	Rated secondary current:	5A或 or 1A
额定频率	Rated frequency:	50-60Hz
工频耐压	Power frequency withstand voltage:	3kV 1min
环境温度	Ambient temperature:	-5℃~+40℃
安装场所	Installation place:	户内 Indoor
产品性能符合标准	Product performance meets the standard:	GB/T20840.1、2, IEC 61869-1、2

规格型号 Specifications and models	额定一次电流 Rated primary current (A)	额定负荷 Rated load(VA)		
		0.5级	1	3
LMHK-23	100			1.5
	150			2.5
	250	1.5	5	7.5
	300	2.5	5	7.5
	400	2.5	5	10
LMHK-46	250	1.5	2.5	5
	300	1.5	2.5	5
	400	1.5	2.5	5
	500	2.5	5	7.5
	600	2.5	5	7.5
LMHK-58	400	1.5	2.5	5
	600	2.5	5	7.5
	800	5	7.5	10
	1000	7.5	10	15
	1500	10	15	20
LMHK-88	250	1.5	2.5	5
	400	2.5	5	10
	600	2.5	5	10
	800	5	7.5	10
	1000	7.5	10	15

规格型号 Specifications and models	额定一次电流 Rated primary current (A)	额定负荷 Rated load(VA)		
		0.5级	1	3
LMHK-510	800	5	7.5	10
	1000	7.5	10	15
	1500	10	15	20
	2000	15	20	25
	3000	20	25	30
LMHK-612	1000	7.5	10	15
	1500	10	15	20
	2000	15	20	25
	3000	20	25	30
	4000	20	25	30
LMHK-812	800	5	7.5	10
	1000	7.5	10	15
	1500	10	15	20
	2000	15	20	25
	3000	20	25	30
LMHK-614	1000	7.5	10	15
	2000	10	15	20
	3000	15	20	25
	4000	20	25	30
	5000	20	25	30
LMHK-816	1500	10	15	20
	2500	15	20	25
	4000	15	20	25
	5000	20	25	30
	6000	20	25	30
LMHK-820	4000	15	20	25
	5000	20	25	30
	6000	30	35	40
	7000	30	35	40
	8000	30	35	40

■ 外形及安装尺寸 Overall dimension drawing

型号 Models	外形尺寸 Outline dimension(mm)				
	A	B	C	D	E
LMHK-23	23	32	90	112	40
LMHK-46	40	60	113	140	40
LMHK-58	52	82	123	163	40
LMHK-510	53	103	141	190	48
LMHK-88	82	82	144	161	36
LMHK-612	62	127	164	227	51
LMHK-812	82	122	152	204	40
LMHK-614	63	143	162	210	51
LMHK-816	83	163	182	251	52
LMHK-820	83	205	182	295	52