


Meaning of Model

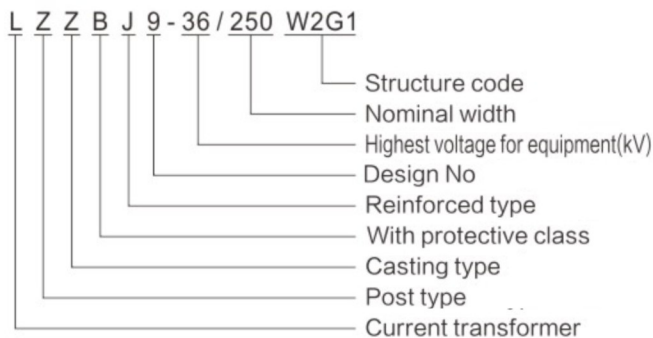

Technical data

Rated primary current (A)	Accuracy classes combination	Rated secondary output(VA)				Short-time thermal current(kA/S)	Rated dynamic current (kA)
		0.2(S)	0.5(S)	5P15	5P20		
20-100	0.5(S)/5P15/5P20 0.5(S)/5P15/5P20	10	15	15	15	2001n	5001n
150-200						31.5	
300-500						31.5/2	
600-1250		15	30	15	20	31.5/4	80
1500-2000		20	40	20	30		
2500		20	40	20	20	40/4	125

Overall dimension drawing

