




Meaning of Model

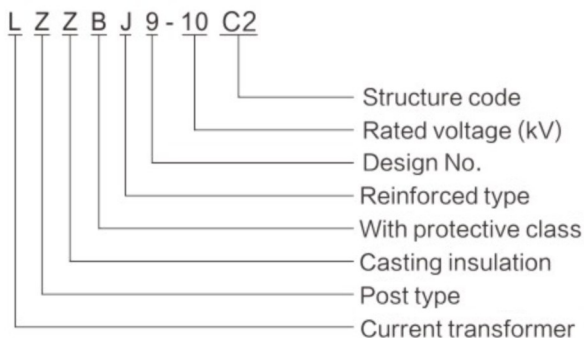

Technical data

Rated primary current (A)	Accuracy classes combination	Rated secondary output(VA)					1s thermal current (kA)	Rated dynamic current (kA)	Notes
		0.2S 0.5S	0.2	0.5	10P10	10P15			
5-150	0.2S/10P15 0.5S/10P15 0.2/10P15 0.5/10P15 10P10/10P10	10	10	15	15	20	150I1n	375I1n	两绕组 Two windings
200							36	80	
300-800							45	100	
1000-1500							63	130	
2000-3150							80	160	
5-150	0.2S/0.2/10P15 0.2S/0.5/10P15 0.2/0.5/10P15 0.5/0.5/10P15	10	10	15	15	15	150I1n	375I1n	三绕组 Three windings
200							36	80	
300-800							45	100	
1000-1500							63	130	
2000-3150							80	160	

Overall dimension drawing

