




Meaning of Model

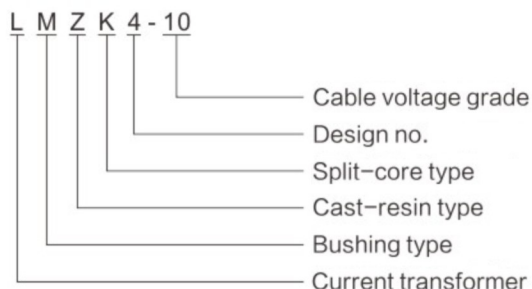


Technical data

Rated secondary current : 5A or 1A
 Rated frequency : 50Hz or 60Hz
 Rated continuous thermal current : 120%I_n
 Power factor of load : COSΦ=0.8(lag)
 Power frequency withstand voltage : 3kV 1min
 Environment temperature : -5℃~+40℃
 Average daily temperature : ≤35℃
 Altitude : ≤1000m
 Pollution level : II
 Product standard : GB20840.1、GB20840.2


Use	Measuring current transformer			Protection current transforme.	
Rated primary current (A)	Accuracy class and rated load (VA)			Accuracy class and rated load (VA)	
	0.5	1	3	10P10	10P5
50					
75					
100			1.5		
150		1.5			
200		1.5			
300	2.5				
400	2.5				
500	2.5				
600	2.5				

Overall dimension drawing

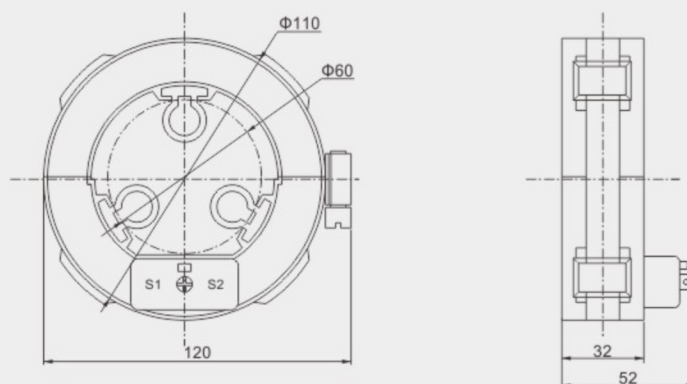



Meaning of Model

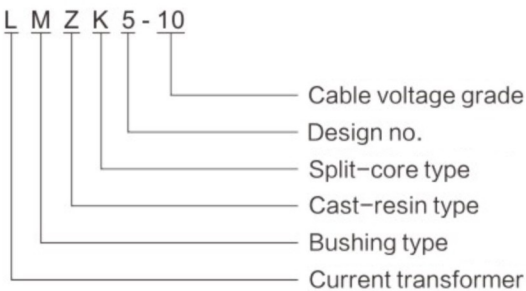

Technical data

Rated secondary current : 5A or 1A
Rated frequency : 50Hz or 60Hz
Rated continuous thermal current : 120%I_n
Power factor of load : COSΦ=0.8(lag)
Power frequency withstand voltage : 3kV 1min
Environment temperature : -5℃~+40℃
Average daily temperature : ≤35℃
Altitude : ≤1000m
Pollution level : II
Product standard : GB20840.1、GB20840.2

Use	Measuring current transformer			Protection current transformer		Double winding current transform...				
Rated primary current (A)	Accuracy class and rated load (VA)			Accuracy class and rated load (VA)		Accuracy class and rated load (VA)				
	0.5	1	3	10P10	10P5	0.5	1	3	10P10	10P5
50			2.5		1					
75			5	1				1		1
100		5		1.5			1		1	
150		7.5		2.5			1.5		1.5	
200		10		3.75			1.5		1.5	
300	20			5		2.5			2.5	
400	30			5		2.5			2.5	
500	50			7.5		3.75			3.75	
600	50			10		5			5	

Overall dimension drawing

