



### ■ Meaning of Model

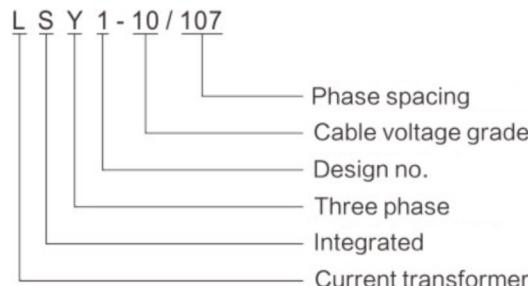

### ■ Technical data


Use	Measuring current transformer				Protection current transformer			Double winding current transformer					
	Rated primary current (A)	Accuracy class and rated load (VA)			10P10	10P5	10P	Accuracy class and rated load (VA)			10P10	10P5	10P
		0.2	0.5	1	3			0.2	0.5	1	3		
50				1.5			1.5			1.5			1.5
75				1.5			1.5			1.5			1.5
100			1.5				1.5			1.5			1.5
150		1.5					1.5			1.5			1.5
200		2.5					1.5			1.5			1.5
300	2.5	5					1.5			2.5			1.5
400	3.75	7.5					1.5			2.5			1.5
500	10	10			1.5				1.5	2.5			1.5
600	10	15			1.5				2.5	2.5			1.5

### ■ Overall dimension drawing

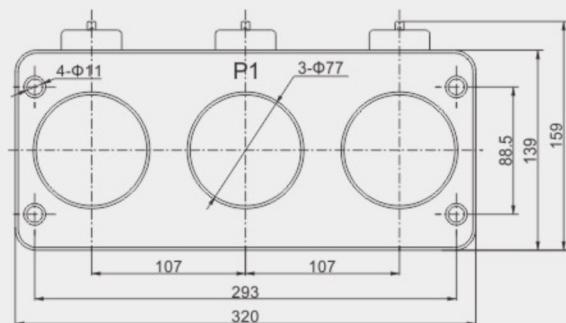




## ■ Meaning of Model

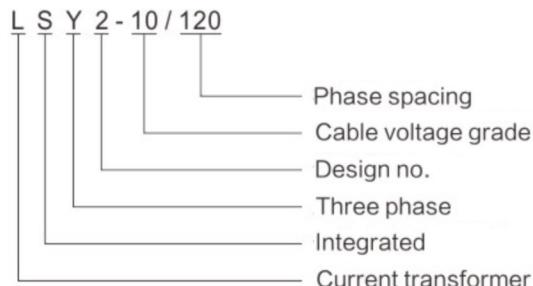


## ■ Technical data

Use	Measuring current transformer				Protection current transformer		Double winding current transformer					
	Accuracy class and rated load (VA)				Accuracy class and rated load (VA)		Accuracy class and rated load (VA)					
Rated primary current (A)	0.2S	0.2	0.5S	0.5	10P10	10P5	0.2S	0.2	0.5S	0.5	10P10	10P5
50				1.5		1						
75			1.5	2.5		1.5						
100		1.5	3.75	3.75		2.5						
150	2.5	5	5	2.5		3.75						
200	5	5	5	5	1.5					1.5		1.5
300	10	10	10	10	2.5					2.5	1.5	
400	12.5	10	5	15	2.5					2.5	1.5	
500	15	20	10	20	3.75				2.5	2.5	2.5	
600	20	25	15	25	5				2.5	2.5	2.5	

## ■ Overall dimension drawing

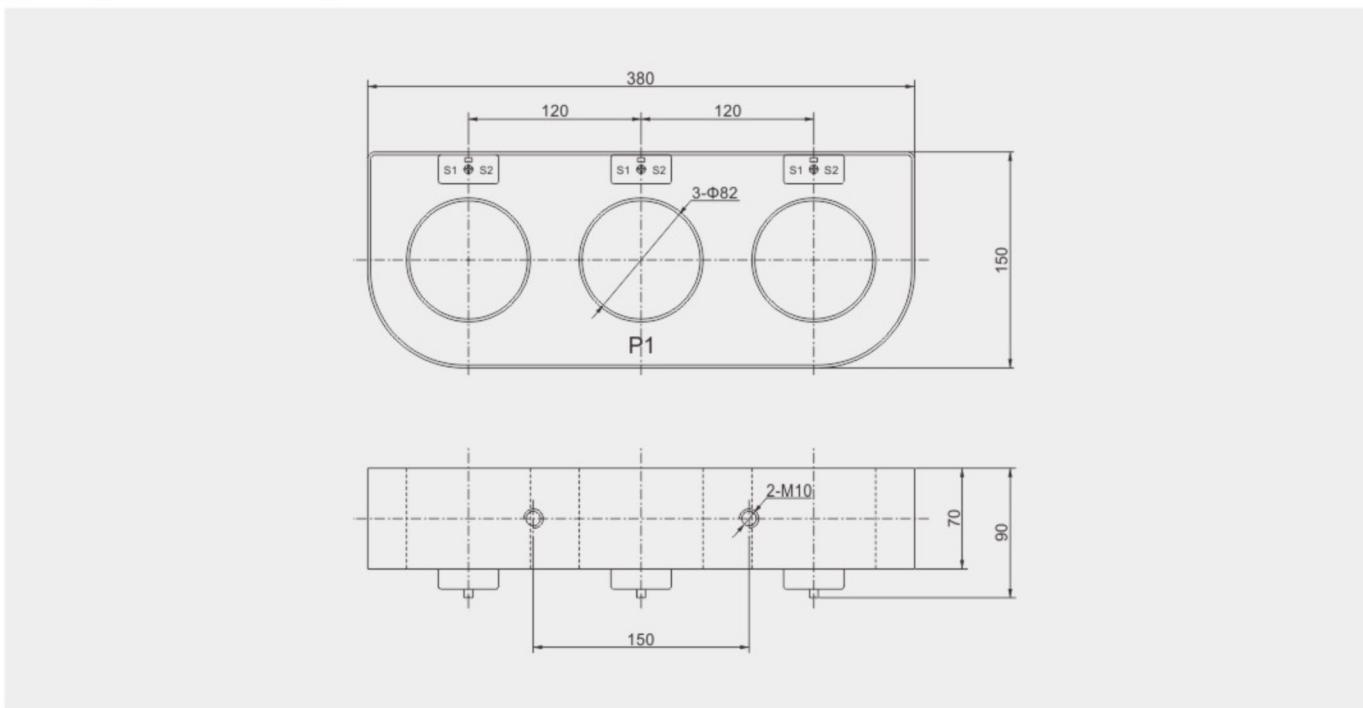



### ■ Meaning of Model

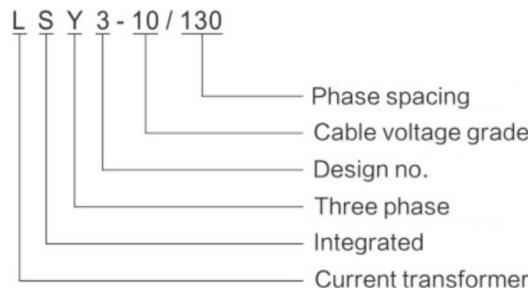

### ■ Technical data


Use	Measuring current transformer				Protection current transformer		Double winding current transformer					
	Accuracy class and rated load (VA)				Accuracy class and rated load (VA)		Accuracy class and rated load (VA)					
Rated primary current (A)	0.2S	0.2	0.5S	0.5	10P10	10P5	0.2S	0.2	0.5S	0.5	10P10	10P5
50/5				2.5		1.5						
75/5		1.5	2.5	3.75		2.5				1		1
100/5	1.5	5	5	5		2.5				1.5		1.5
150/5	5	7.5	7.5	3.75	1.5			1.5	1.5	1.5		1.5
200/5	7.5	7.5	7.5	5	2.5		1.5	1.5	1.5	1.5	1.5	
300/5	15	15	15	15	2.5		2.5	2.5	2.5	3.75	1.5	
400/5	20	10	5	20	2.5		2.5	2.5	2.5	5	1.5	
500/5	25	25	15	25	3.75		2.5	2.5	2.5	7.5	1.5	
600/5	30	30	20	30	5		3.75	3.75	5	10	1.5	

### ■ Overall dimension drawing

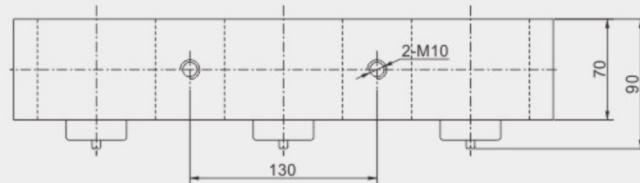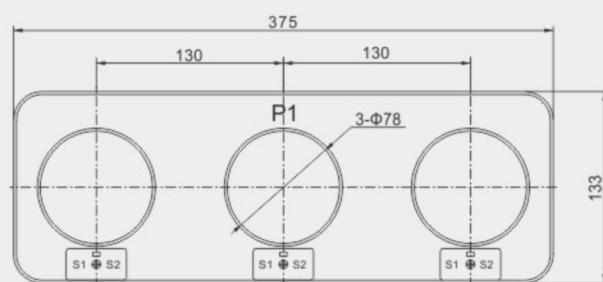




### ■ Meaning of Model

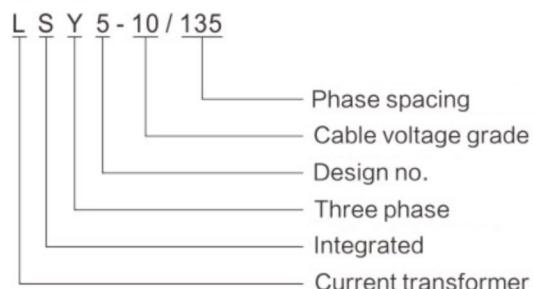

### ■ Technical data


Use	Measuring current transformer				Protection current transformer		Double winding current transformer					
	Accuracy class and rated load (VA)				Accuracy class and rated load (VA)		Accuracy class and rated load (VA)					
Rated primary current (A)	0.2S	0.2	0.5S	0.5	10P10	10P5	0.2S	0.2	0.5S	0.5	10P10	10P5
50				2.5		1.5						
75		1.5	2.5	3.75		1.5						
100		5	5	5	1.5				1.5	1.5		1.5
150	2.5	10	10	2.5	2.5			2.5	2.5	2.5		2.5
200	7.5	12.5	12.5	5	3.75			2.5	2.5	2.5		2.5
300	20	20	20	10	5		2.5	2.5	2.5	2.5	2.5	
400	25	25	7.5	20	6.25		2.5	2.5	2.5	2.5	2.5	
500	30	25	10	30	7.5		3.75	3.75	3.75	3.75	3.75	
600	35	35	25	40	10		5	5	5	5	5	

### ■ Overall dimension drawing

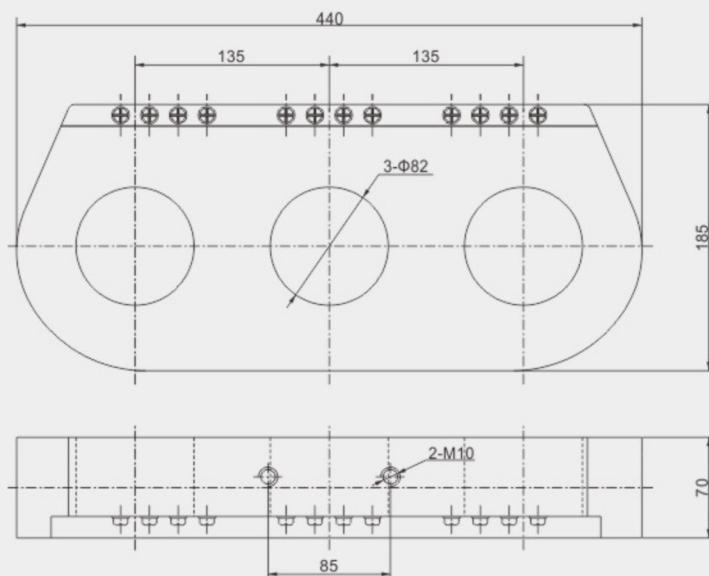




### ■ Meaning of Model

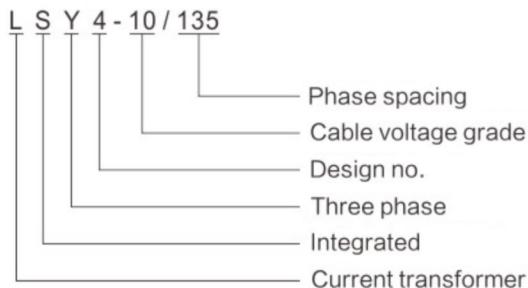

### ■ Technical data


Use	Measuring current transformer				Protection current transformer	
	Accuracy class and rated load (VA)				Accuracy class and rated load (VA)	
Rated primary current (A)	0.2S	0.2	0.5S	0.5	10P10	10P5
50				2.5		
75			1.5	3.75		1.5
100		2.5	5	5		2.5
150	1.5	7.5	7.5	3.75	1.5	
200	5	7.5	7.5	5	2.5	
300	15	15	15	15	3.75	
400	20	10	5	20	5	
500	20	20	10	20	5	
600	30	30	20	30	5	

### ■ Overall dimension drawing

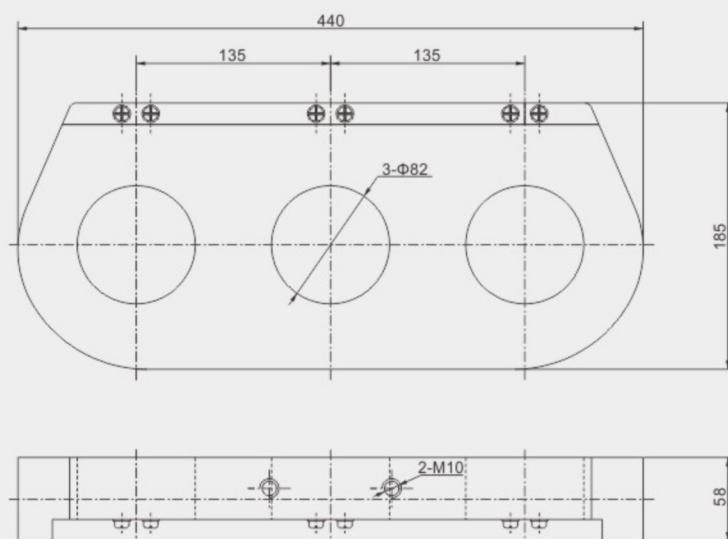



### ■ Meaning of Model

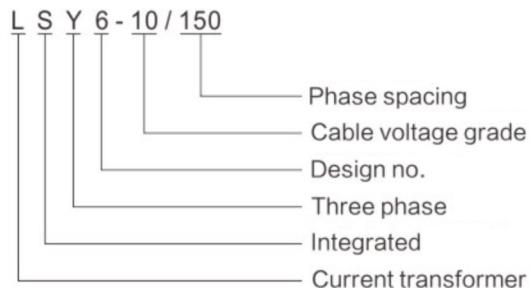

### ■ Technical data

Use	Measuring current transformer				Protection current transformer			Double winding current transformer						
	Accuracy class and rated load (VA)				Accuracy class and rated load (VA)			Accuracy class and rated load (VA)						
Rated primary current (A)	0.2	0.5	1	3	10P10	10P5	10P	0.2	0.5	1	3	10P10	10P5	10P
50				1.5				1.5			1.5			1.5
75				1.5				1.5			1.5			1.5
100			1.5					1.5			1.5			1.5
150		1.5					1.5			1.5			1.5	
200		2.5					1.5			1.5			1.5	
300	2.5	5					1.5			2.5			1.5	
400	3.75	7.5					1.5			2.5			1.5	
500	10	10			1.5			1.5	2.5				1.5	
600	10	15			1.5			1.5	2.5				1.5	

### ■ Overall dimension drawing

